




hosseven



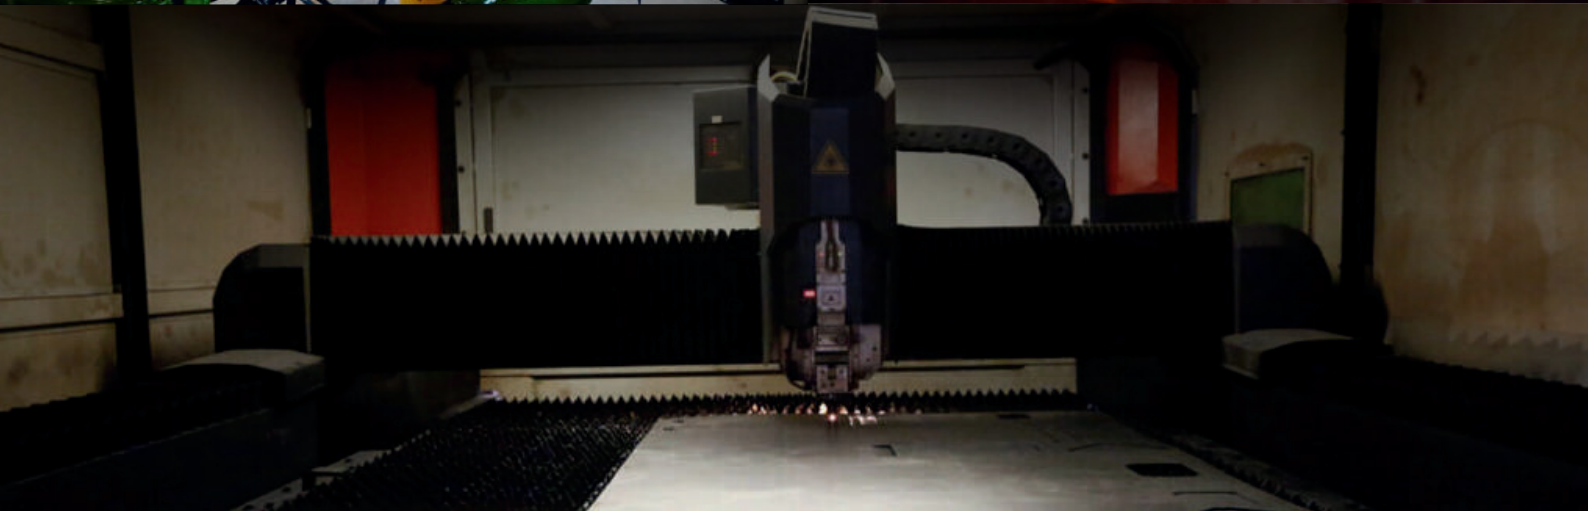

ABOUT US

Since 1962, Hoşseven has been warming homes near and far. Founded by Nahit Hoşseven, our team of over 300 dedicated experts operates from a massive 20,000 square meter site in Bursa, Turkey. We're not just about heating systems anymore! We also craft high-quality cast iron cookware under the HOSSE brand, offering a complete solution for cozy homes and delicious meals.

Quality is our passion. Every product, from classic solid fuel and oven stoves to modern central heating systems, pellet stoves, and natural gas heaters, is meticulously crafted in our state-of-the-art foundry and manufacturing facilities. We use cutting-edge technology like laser cutting and robot welding to ensure consistent excellence. And thanks to our commitment to research and development, computer-aided design, and rigorous testing, we've solidified our position as an industry leader.

We don't just heat Turkey, we heat the world! Through our robust network of dealers and service points, we've cultivated a loyal customer base across over 30+ countries worldwide. Our unwavering commitment to quality, timely delivery, competitive pricing, and exceptional after-sales service fuels our rapid international expansion, both under the Hoşseven brand and as an OEM supplier.

Investing in our people is key. We actively recruit and train technically skilled personnel, contributing to Turkey's vision of a strong manufacturing sector. As a frontrunner in the heating industry, we're known for our agility, adapting swiftly to evolving trends around the globe.



A⁺





8000

CHARACTERISTIC FEATURES

- Adjustable primary secondary air
- Wide combustion door window
- Totally casting iron surfaces
- Left and right sides window
- Tertiary air
- Large ashtray
- Large cooking oven
- Window cleaning system with fresh air
- Enamelled surfaces



TECHNICAL DATA





A⁺









8005

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Totally casting iron surfaces
Tertiary air
Large ashtray
Wide combustion door window
Window cleaning system with fresh air
Enamelled surfaces



TECHNICAL DATA

Fuel  Wood Log size 40 cm	Nominal Heat Power  7.09 kw	Efficiency 83.14% Weight (kg) 90	Colours  6	 516 652 683
Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass 	Max Heating Space  203 m ³		 458



A⁺









8005 CK

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Totally casting iron surfaces
Tertiary air
Large ashtray
Wide combustion door window
Window cleaning system with fresh air
Enamelled surfaces
Left and right sides window



TECHNICAL DATA

Fuel  Wood Log size 40 cm	Nominal Heat Power  7.09 kw	Efficiency 83.14 % Weight (kg) 90	Colours  6	 593 652 683
Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass 	Max Heating Space  203 m ³		 458



A⁺









8010

CHARACTERISTIC FEATURES

Adjustable primarysecondary air
Totally casting iron surfaces
Tertiary air
Enamelled surfaces
Large ashtray
Large cooking oven
Wide combustion door window
Window cleaning system with fresh air



TECHNICAL DATA

Fuel  Wood Log size 40 cm	Nominal Heat Power  7.09 kw	Efficiency 83.14% Weight (kg) 132	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	
Oven Dimensions Width 375 mm Length 218 mm Depth 320 mm	Heat Resistant Glass 	Max Heating Space  203 m ³	Colours 	



A⁺









8010 CK

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Totally casting iron surfaces
Tertiary air
Enamelled surfaces
Large ashtray
Large cooking oven
Wide combustion door window
Window cleaning system with fresh air
Left and right sides window



TECHNICAL DATA

Fuel  Wood Log size 40 cm	Nominal Heat Power  7.09 kw	Efficiency 83.14 % Weight (kg) 133	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	
Oven Dimensions Width 375 mm Length 218 mm Depth 320 mm	Heat Resistant Glass 	Max Heating Space  203 m ³	Colours 	



A⁺

8015

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Wide combustion door window
Totally casting iron surfaces
Tertiary air
Large ashtray
Window cleaning system with fresh air
Enamelled surfaces



BimSchV
1-2



TECHNICAL DATA

Fuel



Wood
Log size
55 cm

Nominal Heat Power



10.5 kw

Efficiency

82.9 %

Weight (kg)
134

Colours



6

Flue Exit Pipe



Ø120 mm
Ø130 mm
Ø150 mm


Heat Resistant Glass



Max Heating Space



300 m³

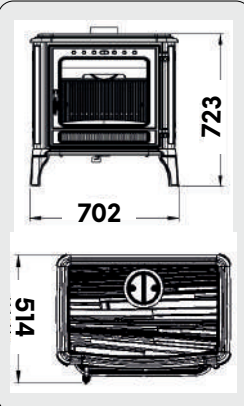

A⁺

8015 CK

CHARACTERISTIC FEATURES

Adjustable primarysecondary air
Wide combustion door window
Totally casting iron surfaces
Left and right sides window
Tertiary air
Large ashtray
Window cleaning system with fresh air
Enamelled surfaces



BimSchV
1-2



TECHNICAL DATA

Fuel



Wood
Log size
55 cm

Nominal Heat Power



10.5 kw

Efficiency

82.9 %

Weight (kg)
134

Colours



6

Flue Exit Pipe



Ø120 mm
Ø130 mm
Ø150 mm


Heat Resistant Glass



Max Heating Space



300 m³

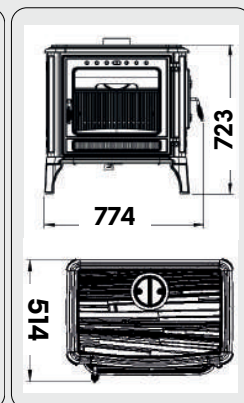



A⁺

8020

CHARACTERISTIC FEATURES









Adjustable primary secondary air
Wide combustion door window
Totally casting iron surfaces
Tertiary air
Large ashtray
Large cooking oven
Window cleaning system with fresh air
Enamelled surfaces



BimSchV
1-2



TECHNICAL DATA

Fuel  Wood Log size 55 cm	Nominal Heat Power  10.7 kw	Efficiency 83.2 % Weight (kg) 188	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	
Oven Dimensions Width 515 mm Length 360 mm Depth 220 mm	Heat Resistant Glass 	Max Heating Space  312 m ³	Colours 	



A⁺

8020 CK

CHARACTERISTIC FEATURES









Adjustable primarysecondary air
Wide combustion door window
Totally casting iron surfaces
Left and right sides window
Tertiary air
Large ashtray
Large cooking oven
Window cleaning system with fresh air
Enamelled surfaces



BimSchV
1-2



TECHNICAL DATA

Fuel  Wood Log size 55 cm	Nominal Heat Power  10.7 kw	Efficiency 83.2 % Weight (kg) 188	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	
Oven Dimensions Width 515 mm Length 360 mm Depth 220 mm	Heat Resistant Glass 	Max Heating Space  312 m ³	Colours 	



A⁺









8025

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Wide combustion door window
Totally casting iron surfaces
Tertiary air
Large ashtray
Large cooking oven
Window cleaning system with fresh air
Enamelled surfaces



TECHNICAL DATA

Fuel  Wood Log size 40 cm	Nominal Heat Power  8.5 kw	Efficiency 83.4% Weight (kg) 119	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	
Oven Dimensions Width 396 mm Length 255 mm Depth 440 mm	Heat Resistant Glass 	Max Heating Space  243 m ³	Colours 	



A⁺









8025 C

CHARACTERISTIC FEATURES

Adjustable primarysecondary air
Wide combustion door window
Totally casting iron surfaces
Right side window
Tertiary air
Large ashtray
Large cooking oven
Window cleaning system with fresh air
Enamelled surfaces



TECHNICAL DATA

Fuel  Wood Log size 40 cm	Nominal Heat Power  8.5 kw	Efficiency 83.14 % Weight (kg) 120	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	
Oven Dimensions Width 396 mm Length 255 mm Depth 440 mm	Heat Resistant Glass 	Max Heating Space  243 m ³	Colours 	



4035

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Tertiary air
Wide combustion door window
Large drawer
Cast iron grate
Cast iron combustion chamber
Large ashtray
Large cooking oven
Window cleaning system with fresh air
Enamelled surfaces



TECHNICAL DATA

Fuel Wood Log size 35 cm	Nominal Heat Power 8.86 kw	Efficiency 82.88 % Weight (kg) 148	Flue Exit Pipe Ø150 mm	Dimensions Width 362 mm Length 296 mm Depth 442 mm	Heat Resistant Glass 253 m²	Max Heating Space 253 m²	Colours Green, Yellow, Red, Black	Diagram 885 1049 659
--	--------------------------------------	---	----------------------------------	--	---------------------------------------	------------------------------------	---	--------------------------------------

A

4050 LOTUS INOX

TECHNICAL DATA

Fuel Wood Log size 40 cm	Nominal Heat Power 11.16 kw	Efficiency 82.48 % Weight (kg) 118	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 440 mm Length 320 mm Depth 376 mm	Heat Resistant Glass 319 m²	Max Heating Space 319 m²	Colours Green, Yellow, Red, Black	Diagram 985 900 665
--	---------------------------------------	---	--	--	---------------------------------------	------------------------------------	---	-------------------------------------

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Wide combustion door window
Cast iron grate
Large ashtray
Large drawer
Large cooking oven
Cast iron or firebrick combustion chamber
Glass cleaning system with fresh air
Enamelled surfaces



4050 LOTUS CLASSIC

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Cast iron grate
Wide combustion door window
Large ashtray
Large drawer
Cast iron or firebrick combustion chamber
Glass cleaning system with fresh air
Enamelled surfaces



TECHNICAL DATA

Fuel Wood Log size 40 cm	Nominal Heat Power 11.16 kw	Efficiency 82.48 % Weight (kg) 114	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 430 mm Length 320 mm Depth 470 mm	Heat Resistant Glass 319 m²	Max Heating Space 319 m²	Colours Green, Yellow, Red, Black	Diagram 955 885 623
--	---------------------------------------	---	--	--	---------------------------------------	------------------------------------	---	-------------------------------------

A+



4040 ANATOLIA

CHARACTERISTIC FEATURES

Cast iron grate
Large ashtray
Enameled surfaces
Large cooking oven
Cast iron combustion chamber
Drawer



TECHNICAL DATA

Fuel Wood Log size 30 cm	Nominal Heat Power 7.9 kw	Efficiency 81.45 %	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 480 mm Length 258 mm Depth 420 mm	Heat Resistant Glass	Max Heating Space 226 m²	Colours	Diagram 930 900 585
--	-------------------------------------	------------------------------	--	--	-----------------------------	------------------------------------	----------------	-------------------------------------

A+

4012 C

CHARACTERISTIC FEATURES

Cast iron grate
Large ashtray
Enameled surfaces
Large cooking oven
Cast iron combustion chamber
Drawer



TECHNICAL DATA

Fuel Wood Log size 30 cm	Nominal Heat Power 7.7 kw	Efficiency 82.63 %	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 454 mm Length 195 mm Depth 444 mm	Heat Resistant Glass	Max Heating Space 220 m²	Colours	Diagram 766 876 552
--	-------------------------------------	------------------------------	--	--	-----------------------------	------------------------------------	----------------	-------------------------------------

A+

4012 CA

CHARACTERISTIC FEATURES

Cast iron grate
Large ashtray
Enameled surfaces
Large cooking oven
Cast iron combustion chamber
Drawer



TECHNICAL DATA

Fuel Wood Log size 30 cm	Nominal Heat Power 7.7 kw	Efficiency 82.63 %	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 454 mm Length 195 mm Depth 444 mm	Heat Resistant Glass	Max Heating Space 220 m²	Colours	Diagram 850 897 900 552
--	-------------------------------------	------------------------------	--	--	-----------------------------	------------------------------------	----------------	--

A+



4020

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Cast iron grate
Wide combustion door window
Large ashtray
Large drawer
Large cooking oven
Firebrick combustion chamber
Glass cleaning system with fresh air



TECHNICAL DATA

Fuel Wood Log size 35 cm	Nominal Heat Power 7.9 kw	Efficiency 81.45 %	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 440 mm Length 281 mm Depth 420 mm	Heat Resistant Glass	Max Heating Space 226 m²	Colours	Diagram 770 900 512
--	-------------------------------------	------------------------------	--	--	-----------------------------	------------------------------------	----------------	-------------------------------------

A+









4010

CHARACTERISTIC FEATURES

Firebrick combustion chamber
Cast iron grate
Cooking top panel
Enameled surfaces
Large cooking oven
Large drawer



TECHNICAL DATA

Fuel  Wood Log size 37 cm	Nominal Heat Power  7.9 kw	Efficiency 81.45 % Weight (kg) 65	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm
Oven Dimensions Width 470 mm Length 220 mm Depth 440 mm	Heat Resistant Glass 	Max Heating Space  226 m ²	Colours 

A⁺


4011

CHARACTERISTIC FEATURES

Firebrick combustion chamber
Cast iron grate
Cooking top panel
Enameled surfaces
Large cooking oven



TECHNICAL DATA

Fuel  Wood Log size 34 cm	Nominal Heat Power  7.9 kw	Efficiency 81.45 % Weight (kg) 46	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm
Oven Dimensions Width 400 mm Length 200 mm Depth 400 mm	Heat Resistant Glass 	Max Heating Space  226 m ²	Colours 

A⁺








4014

CHARACTERISTIC FEATURES

Cast iron grate
Large ashtray
Large cooking oven
Firebrick combustion chamber



TECHNICAL DATA

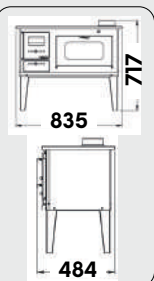Fuel  Wood Log size 35 cm	Nominal Heat Power  7.9 kw	Efficiency 81.45 % Weight (kg) 46	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 415 mm Length 360 mm Depth 402 mm
Oven Dimensions Width 415 mm Length 360 mm Depth 402 mm	Heat Resistant Glass 	Max Heating Space  226 m ²	Colours 	Diagram 

A⁺










4015

CHARACTERISTIC FEATURES

Cast iron grate
Large ashtray
Large cooking oven
Firebrick combustion chamber
Enameled surfaces



TECHNICAL DATA

Fuel  Wood Log size 45 cm	Nominal Heat Power  7.9 kw	Efficiency 81.45 % Weight (kg) 67,5	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Dimensions Width 511 mm Length 398 mm Depth 502 mm
Oven Dimensions Width 511 mm Length 398 mm Depth 502 mm	Heat Resistant Glass 	Max Heating Space  226 m ²	Colours 	Diagram 

A⁺









4013 MINI

CHARACTERISTIC FEATURES

Cast iron grate
Large ashtray
Enameled surfaces
Large cooking oven
Cast iron combustion chamber
Cast iron doors



TECHNICAL DATA

Fuel  Wood Log size 30 cm	Nominal Heat Power  8 kw	Efficiency 81.47 % Weight (kg) 89	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Oven Dimensions Width 390 mm Length 228 mm Depth 441 mm	Heat Resistant Glass  229 m²	Max Heating Space  229 m²	Colours 	Dimensions Width 390 mm Length 228 mm Depth 441 mm
--	--	--	---	---	--	---	---	--

A+







4013 MAXI

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Wide combustion door window
Cast iron grate
Large ashtray
Large drawer
Large cooking oven
Cast iron or firebrick combustion chamber
Glass cleaning system with fresh air
Enamelled surfaces



TECHNICAL DATA

Fuel  Wood Log size 30 cm	Nominal Heat Power  8 kw	Efficiency 81.47 % Weight (kg) 93	Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Oven Dimensions Width 440 mm Length 320 mm Depth 375 mm	Heat Resistant Glass  229 m²	Max Heating Space  229 m²	Colours 	Dimensions Width 440 mm Length 320 mm Depth 375 mm
---	--	--	---	---	--	---	---	--







4001

CHARACTERISTIC FEATURES

Enameled surfaces
Large cooking oven
Adjustable inlet air
Cast iron top plate
Combustion with bucket



TECHNICAL DATA

Nominal Heat Power  6.5 kw	Efficiency 73 % Weight (kg) 44	Flue Exit Pipe  Ø130 mm	Oven Dimensions Width 300 mm Length 168 mm Depth 380 mm	Max Heating Space  185 m²	Colours 	Dimensions Width 300 mm Length 168 mm Depth 380 mm
---	---	---	---	---	---	--

A











5010 OLYMPUS

CHARACTERISTIC FEATURES

Large ashtray
Adjustable primary secondary air
Wide view glass
Ash shaking handle for easy removal
Cast iron grate
Cast iron combustion chamber
Glass cleaning system with fresh air



TECHNICAL DATA

Fuel  Wood Log size 35 cm	Nominal Heat Power  7.78 kw	Efficiency 76.77 %	Weight (kg) 52
Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass 	Max Heating Space  223 m ³	Dimensions  497 725 403

A







5020 ASSOS

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Wide view glass
Ash shaking handle for easy removal
Cast iron grate
Cast iron combustion chamber
Glass cleaning system with fresh air
Log store
Large ashtray



TECHNICAL DATA

Fuel  Wood Log size 35 cm	Nominal Heat Power  7.78 kw	Efficiency 76.77 %	Weight (kg) 63
Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass 	Max Heating Space  223 m ³	Dimensions  900 500 409

A











5025 TROY

CHARACTERISTIC FEATURES

Adjustable primarysecondary air
Cooking oven
Cast iron grate
Cast iron combustion chamber
Wide view glass
Glass cleaning system with fresh air
Ash shaking handle for easy removal
Large ashtray
Log store



TECHNICAL DATA

Fuel  Wood Log size 35 cm	Nominal Heat Power  7.79 kw	Efficiency 76.81 %	Weight (kg) 68
Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass 	Max Heating Space  223 m ³	Wood Box  Yes
			Oven Dimensions  385 mm
			Dimensions  977 500 408

A







5035 EFES

CHARACTERISTIC FEATURES

Large ashtray
Adjustable primary secondary air
Cast iron grate
Cast iron combustion chamber
Wide view glass
Ash shaking handle for easy removal
Glass cleaning system with fresh air
Log store




TECHNICAL DATA

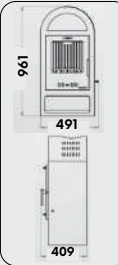Fuel Wood Log size 35 cm	Nominal Heat Power 7.78 kw	Efficiency 76.77 %	
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 223 m ³	

A

5050 CELINE

TECHNICAL DATA

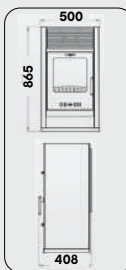Fuel Wood Log size 35 cm	Nominal Heat Power 7.78 kw	Efficiency 76.77 %	
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 223 m ³	

A

CHARACTERISTIC FEATURES

Large ashtray
Adjustable primary secondary air
Cast iron grate
Cast iron combustion chamber
Wide view glass
Ash shaking handle for easy removal
Glass cleaning system with fresh air
Log store




5060 ROSE

CHARACTERISTIC FEATURES

Large ashtray
Adjustable primary secondary air
Cast iron grate
Fire brick combustion chamber
Wide view glass
Glass cleaning system with fresh air
Drawer




TECHNICAL DATA

Fuel Wood Log size 40 cm	Nominal Heat Power 7.78 kw	Efficiency 76.77 %	Colours	
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 223 m ³	4	

A

5065 ROSE OVEN

TECHNICAL DATA

Fuel Wood Log size 40 cm	Nominal Heat Power 7.78 kw	Efficiency 76.77 %	Oven Dimensions 1180 mm height, 500 mm width, 400 mm depth	
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 223 m ³	Colours	

A

CHARACTERISTIC FEATURES

Adjustable primary secondary air
Cast iron grate
Fire brick combustion chamber
Cooking Oven
Wide view glass
Glass cleaning system with fresh air
Drawer
Large ashtray





5070

CHARACTERISTIC FEATURES

Adjustable primary - secondary - tertiary air
Large ashtray
Wide combustion door window
Cast iron grate
Cast iron or firebrick combustion chamber
Window cleaning system with fresh air



TECHNICAL DATA

Fuel Wood Log size 50 cm	Nominal Heat Power 10.05 kw	Efficiency 82.03 %	Weight (kg) 5070-P 113 5070-L 100
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 287 m ²	Dimensions 5070-P: 704x595x380 mm 5070-L: 704x595x380 mm

A⁺

5071

CHARACTERISTIC FEATURES

Adjustable prima-secondary-tertiary air
Wide combustion door window
Cast iron grate
Cast iron or firebrick combustion chamber
Window cleaning system with fresh air
Left and right sides window
Large ashtray



TECHNICAL DATA

Fuel Wood Log size 50 cm	Nominal Heat Power 10.05 kw	Efficiency 82.03 %	Weight (kg) 5071-P 104 5071-L 91
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 287 m ²	Dimensions 5071-P: 704x595x380 mm 5071-L: 704x595x380 mm


A⁺



5080

CHARACTERISTIC FEATURES

Adjustable primary-secondary-tertiary air
Wide combustion door window
Cast iron grate
Large ashtray
Cast iron or firebrick combustion chamber
Window cleaning system with fresh air



TECHNICAL DATA

Fuel Wood Log size 35 cm	Nominal Heat Power 10.05 kw	Efficiency 82.03 %	Weight (kg) 5080-P 119 5080-L 110
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 287 m ²	Dimensions 5080-P: 474x920x380 mm 5080-L: 474x920x380 mm

A⁺

5090

CHARACTERISTIC FEATURES

Adjustable primary-secondary-tertiary air
Wide combustion door window
Cast iron grate
Cast iron or firebrick combustion chamber
Large ashtray
Window cleaning system with fresh air



TECHNICAL DATA

Fuel Wood Log size 35 cm	Nominal Heat Power 6.5 kw	Efficiency 82.03 %	Weight (kg) 5090-P 87 5090-L 78
Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass	Max Heating Space 186 m ²	Dimensions 5090-P: 474x895x380 mm 5090-L: 474x895x380 mm

A⁺





7000

CHARACTERISTIC FEATURES






Adjustable primary-secondary air
Oval surfaces
Wide oval combustion door window
Tertiary air
Cast iron grate
Vermiculite combustion chamber
Window cleaning system with fresh air
Large ashtray



BimSchV
1-2









TECHNICAL DATA

Fuel  Wood Log size 30 cm	Nominal Heat Power  8.84 kw	Efficiency 83.07 % Weight (kg) 100	 1123 540
Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass 	Max Heating Space 253 m ²	

A⁺

9005

TECHNICAL DATA

Fuel  Wood Log size 25 cm	Nominal Heat Power  6.4 kw	Efficiency 82.8 % Weight (kg) 66	Colours  4	 842 389 453
Flue Exit Pipe  Ø120 mm Ø130 mm	Heat Resistant Glass 	Max Heating Space 183 m ²		

A

CHARACTERISTIC FEATURES

Adjustable primary-secondary air
Wide view glass
Cast iron grate
Tertiary air
Large ashtray
Ash shaking handle
Glass cleaning system with fresh air
Cast iron combustion chamber
Enamelled surfaces



BimSchV
1-2



9008 MINI

CHARACTERISTIC FEATURES







Adjustable primary- secondary air
Cast iron grate
Glass window
Tertiary air
Large ashtray
Glass cleaning system with fresh air
Firebrick combustion chamber
Enamelled surfaces



BimSchV
1-2



TECHNICAL DATA

Fuel  Wood Log size 25 cm	Nominal Heat Power  7.09 kw	Efficiency 78.68 % Weight (kg) 52	Colours  4	 800 410 382
Flue Exit Pipe  Ø120 mm Ø130 mm Ø150 mm	Heat Resistant Glass 	Max Heating Space 203 m ²		

A

9008 MAXI

CHARACTERISTIC FEATURES

Adjustable primary-secondary air
Tertiary air
Large ashtray
Glass cleaning system with fresh air
Glass window
Cast iron grate
Firebrick combustion chamber
Enamelled surfaces
Log Store



BimSchV
1-2





VERA HYDRO

CHARACTERISTIC FEATURES

Mechanical thermostat control
Adjustable primary secondary air
40°C Automatic pump control
Large ashtray
Long wood loading door
Heating with radiators system
Glass cleaning system with fresh air
Cookable area top of stove



TECHNICAL DATA

Fuel Wood Log size 35 cm	Nominal Heat Power 24.92 kW	Efficiency 81,56 % Weight (kg) 135	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Radiators Pipe Connection 1"	Colours 4	Dimensions 545 880 690
Boiler Water Volume 35 lt	Heat Resistant Glass	Max Heating Space 713 m ³	Max Radiator 10 m	Operation Water Pressure Atmospheric		

VERA OVEN HYDRO

TECHNICAL DATA

Fuel Wood Log size 35 cm	Nominal Heat Power 24.92 kW	Efficiency 81,56 % Weight (kg) 165	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Max Heating Space 713 m ³	Heat Resistant Glass	Dimensions 545 1090 690
Radiators Pipe Connection 1"	Boiler Water Volume 42 lt	Max Radiator 10 m	Operation Water Pressure Atmospheric	Oven Dimensions Width 345 mm Length 170 mm Depth 350 mm	Colours 4	

CHARACTERISTIC FEATURES

Mechanical thermostat control
Adjustable primary secondary air
40°C Automatic pump control
Large ashtray
Long wood loading door
Large cooking oven
Heating with radiators system
Glass cleaning system with fresh air
Cookable area top of stove



LOTUS HYDRO

CHARACTERISTIC FEATURES

Heating with radiators system
40°C Automatic pump control
Large ashtray
Long wood loading door
Mechanical thermostat control
Adjustable primary secondary air
Cookable area top of stove
Glass cleaning system with fresh air
Large cooking oven



TECHNICAL DATA

Fuel Wood Log size 35 cm	Nominal Heat Power 31.67 kW	Efficiency 77,23 % Weight (kg) 175	Flue Exit Pipe Ø120 mm Ø130 mm Ø150 mm	Max Heating Space 887 m ³	Heat Resistant Glass	Dimensions 850 1100 660
Radiators Pipe Connection 1"	Boiler Water Volume 40 lt	Max Radiator 13 m	Operation Water Pressure Atmospheric	Oven Dimensions Width 435 mm Length 290 mm Depth 505 mm	Colours 4	



P15 HYDRO

CHARACTERISTIC FEATURES

Programmable daily and weekly settings
Low emissions values
Automatic control system and ignition
Heating with radiators system
Glass cleaning system with fresh air
External room thermostat connection
5 different power levels
Expansion vessel, pump, thermostat
are inside the stove
Installing inside area
Oval surfaces



TECHNICAL DATA

Fuel Pellet	Nominal Heat Power 15.01 kw	Efficiency 91.57 % Weight (kg) 165	Flue Exit Pipe Ø80 mm	Max Heating Space 429 m³	Heat Resistant Glass	Dimensions 539 1092 680
Room Fan No	Radiators Pipe Connection 1"	Boiler Water Volume 25 lt	Max Radiator 8 m	Operation Water Pressure 1.5 bar	Colours	

A+

P20 HYDRO

CHARACTERISTIC FEATURES

Programmable daily and weekly settings
Low emissions values
Automatic control system and ignition
Adjustable water and room temperature
Glass cleaning system with fresh air
External room thermostat connection
5 different power levels
Expansion vessel, pump, thermostat
are inside the stove
Installing inside area
Heating with radiators system



TECHNICAL DATA

Fuel Pellet	Nominal Heat Power 19.79 kW	Efficiency 93.01% Weight (kg) 193	Flue Exit Pipe Ø80 mm	Max Heating Space 565 m³	Heat Resistant Glass	Dimensions 580 1300 630
Room Fan Opt.	Radiators Pipe Connection 1"	Boiler Water Volume 27 lt	Max Radiator 12 m	Operation Water Pressure 1.5 bar	Colours	

A+



P25 HYDRO

CHARACTERISTIC FEATURES

Programmable daily and weekly settings
Low emissions values
Automatic control system and ignition
Adjustable water and room temperature
Glass cleaning system with fresh air
External room thermostat connection
5 different power levels
Expansion vessel, pump, thermostat
are inside the stove
Installing inside area
Heating with radiators system



TECHNICAL DATA


Fuel Pellet	Nominal Heat Power 24.84 kW	Efficiency 92.74% Weight (kg) 212	Flue Exit Pipe Ø100 mm	Max Heating Space 710 m³	Heat Resistant Glass	Dimensions 580 1300 650
Room Fan Opt.	Radiators Pipe Connection 1"	Boiler Water Volume 29 lt	Max Radiator 14 m	Operation Water Pressure 1.5 bar	Colours	

A+

PK25 HYDRO

CHARACTERISTIC FEATURES

Programmable daily and weekly settings
Low emissions values
Automatic control system and ignition
Heating with radiators system
Adjustable water temperature
External room thermostat connection
5 different power levels
Expansion vessel, pump, thermostat
are inside the stove
Installing outside area

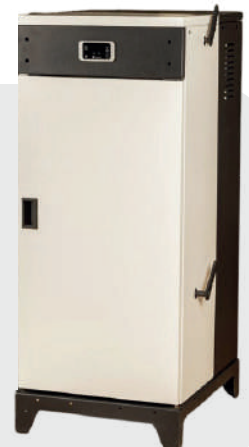

TECHNICAL DATA

Fuel Pellet	Nominal Heat Power 21.9 kW	Efficiency 88.5% Weight (kg) 212	Flue Exit Pipe Ø100 mm	Max Heating Space 626 m³	Colours	Dimensions 593 1407 732
Room Fan No	Radiators Pipe Connection 1"	Boiler Water Volume 33 lt	Max Radiator 14 m	Operation Water Pressure 1.5 bar	Colours 4	

A+











VIOLET

CHARACTERISTIC FEATURES

Oval surface
Automatic control system and ignition
5 different power levels
Glass cleaning system with fresh air
Programmable daily and weekly settings
Low emissions values
Adjustable room temperature
Efficient hot air distribution











TECHNICAL DATA

Fuel  Pellet	Nominal Heat Power  6.57 kW	Efficiency 92.75%	Flue Exit Pipe  Ø80 mm	
Room Fan  Yes	Heat Resistant Glass 	Max Heating Space  188 m ³	Colours 	

P10

TECHNICAL DATA

Fuel  Pellet	Nominal Heat Power  10.06 kW	Efficiency 94.70%	Flue Exit Pipe  Ø80 mm	
Room Fan  Yes	Heat Resistant Glass 	Max Heating Space  288 m ³	Colours 	

CHARACTERISTIC FEATURES

Efficient hot air distribution
Automatic control system and ignition
5 different power levels
Glass cleaning system with fresh air
Programmable daily and weekly settings
Low emissions values
Adjustable room temperature











P13

CHARACTERISTIC FEATURES

Automatic control system and ignition
Low emissions values
Adjustable room temperature
Glass cleaning system with fresh air
Oval surfaces
5 different power levels
Efficient hot air distribution
Programmable daily and weekly settings



TECHNICAL DATA

Fuel  Pellet	Nominal Heat Power  13.16 kW	Efficiency 92.50%	Flue Exit Pipe  Ø80 mm	
Room Fan  Yes	Heat Resistant Glass 	Max Heating Space  376 m ³	Colours 	





hosseven

GROUP COMPANY



HÓ SSE
'Home Appliances'

THERM **ZOFF**

Address: Barakfakih OSB. 10. Cad. No.2 16450 BURSA/TÜRKİYE

Tel: +90 224 384 11 10 / www.hosseven.com.tr

